




The LP FLOWETCH 300 marking system is a semi-automatic compact unit which marks from the bottom. Marking from below provides improved stencil life as the stencil is constantly rinsed by electrolyte which prevents overheating. Large and small prints also benefit from this process with improved quality. Each unit is comprised of the marking control unit (EU Classic 300), a pneumatic system, electrolyte recycling basin, and a securing fixture for the stencil and product to be marked. The LP Flowetch 300 system is specifically very suitable for marking any chrome-plated or nickel-plated products.

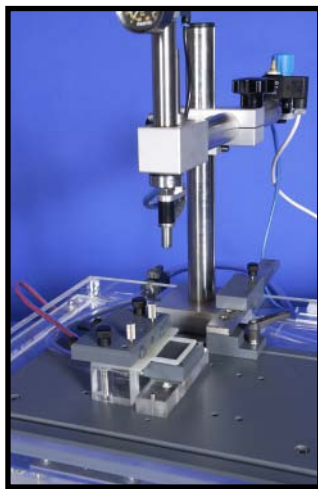

### Advantages

- Non-corrosive electrolytes
- Non-smearing permanent marking
- Digital controls and display
- No part deformation

### Special Accessories

- Double marking (above and below)
- Special marking heads
- Rotary switch table
- Time lapse
- Counter

### Specifications

|                |                    |
|----------------|--------------------|
| Input Voltage  | 115 or 230 V AC    |
| Output Voltage | 0 - 24 V (AC/DC)   |
| Power          | 310 VA             |
| Air Pressure   | 4 bar              |
| Dimensions     | 365 x 500 x 400 mm |